



Fully Recessed

Barrier-Free Fountain

MODEL BFM-L/R (Less Refrigeration)



This water cooler is certified to NSF/ANSI 61.

GENERAL

Fully recessed fountain non-corrosive stainless steel number 300 series with brushed satin finish. One-piece contour-formed basin with rounded corners and edges reduces splatter, insures proper drainage and prevents standing waste water. Ideally suited for high traffic areas. Unit is set up for full frontal wheelchair access. When properly installed model meets state and federal requirements as defined by the Americans with Disabilities Act. Unit is certified to NSF/ANSI 61 and meets requirements of the Safe Drinking Water Act.

BUBBLER

Exclusive one-piece, chrome-plated two-stream mound-building bubbler with non-removable anti-squirt feature and integral hood insures a satisfying drink of water.

AUTOMATIC STREAM HEIGHT REGULATOR

Self-closing assembly is located inside unit to prevent tampering. Unit resists corrosion and liming. A constant stream height is automatically maintained under line pressures that vary from 20 to 105 psi.

PUSHBUTTON ACTUATION MECHANISM

Self closing, vandal-resistant pushbutton does not require grasping or twisting.

INLET STRAINER

Easily cleaned in-line strainer screen traps particles of 140 microns or larger before they enter the waterway.

MOUNTING FRAME

Mounting frame is manufactured of corrosion resistant, galvanized steel. Open construction designed for ease of installation. Mounting frame can be shipped in advance for rough-in installation.

SUGGESTED SPECIFICATIONS

Fountain shall include pushbutton on the front, contour-formed basin to eliminate splashing and standing water, and shall have rounded corners and edges. Projector shall be two-stream, mound-building type with integral hood guard and anti-squirt feature. Fountain shall comply with ANSI 117:1 and ADA for visual and motion disabilities. The manufacturer shall certify the unit to meet the requirements of NSF/ANSI 61, and the Safe Drinking Water Act.

NOTE: Continued product improvement makes specifications subject to change without notice. See Halsey Taylor website for most current spec sheet.



Standard finish is Stainless Steel

Optional Accessories (extra cost)

- Vandal-Resistant Kit
- Easy-Flex™ Bubbler
- Glass Filler (factory installed - no. 2408 style glass filler only).

Each BFM/LR consists of 2 cartons as follows:

BFM Frame Pack
Basin/Panel, BFM

Trap and service stop not included

Shipping weight: 34 lbs

JOB NAME: _____

ENGINEER/CONTRACTOR NAME: _____

APPROVAL: _____
DATE: _____



BFM-L/R

Fully-Recessed Barrier-Free Cooler

(CONTINUED)

MOUNTING INSTRUCTIONS


Refer to diagrams for rough-in of plumbing and for size of wall cut out. Final check for leaks and correct functions of fountain should be made. (For details see the installation instructions.)

Installation requires trap to be installed in wall. Trap and service stop not included.

OPERATING PRESSURES:


Supply water - 105 psi maximum

WALL CUTOUT

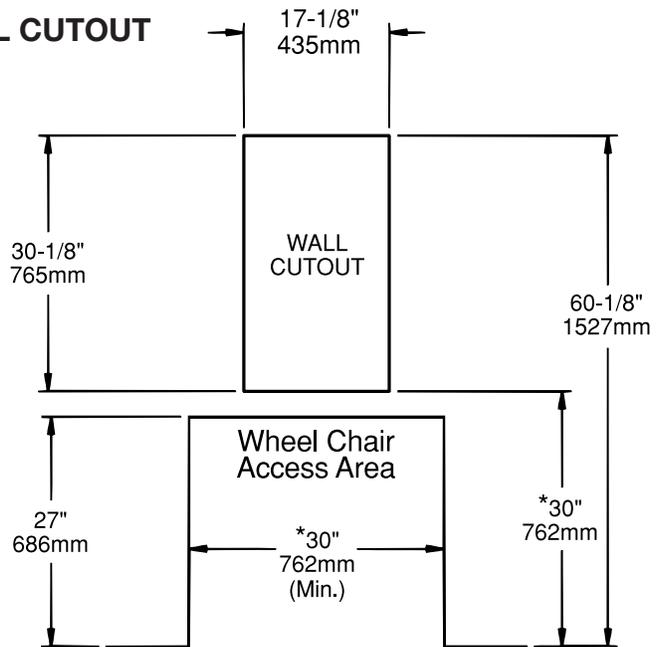

*30" (762mm) to bottom of wall cutout required to obtain 34-1/2" (876mm) rim height (Check local codes)

FRONT & SIDE VIEWS

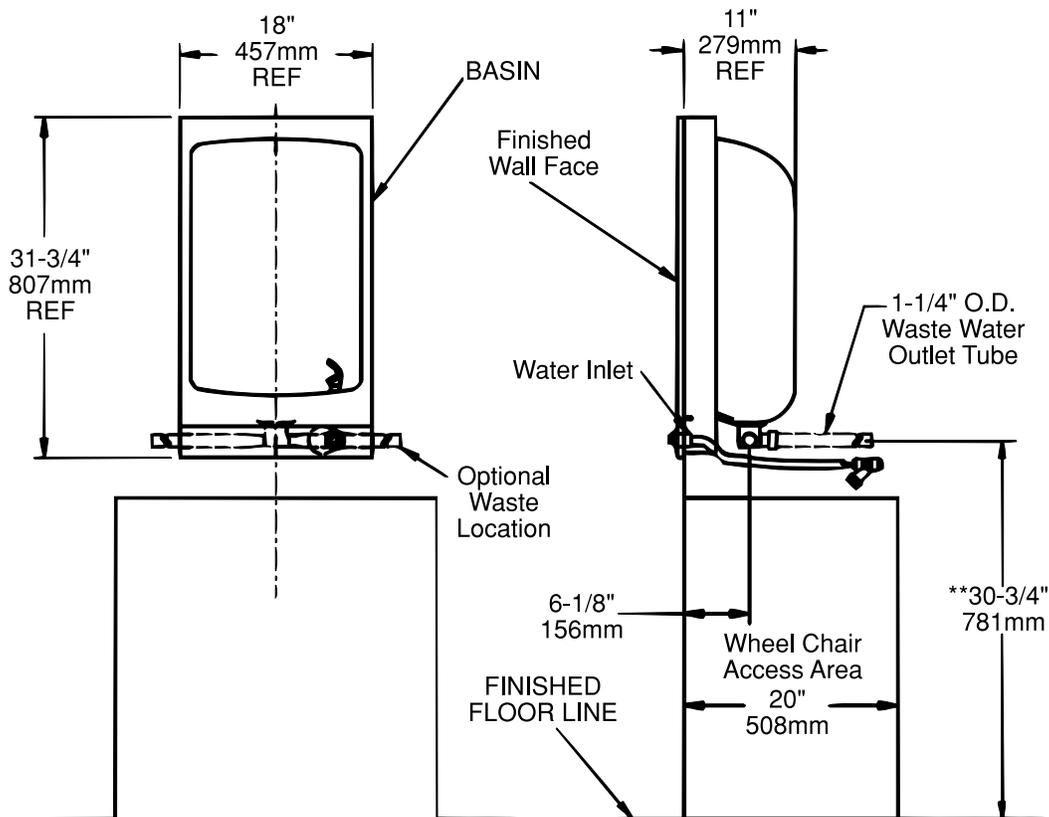

**NOTE: If wall opening height has been adjusted to meet local codes (see wall frame instructions), height dimensions must be adjusted accordingly.