



# Water Coolers



## FREE-STANDING LARGE CAPACITY

### PLF20FA, PLF20FACP

#### Suggested Specification

Cabinet finish shall be Sandstone powder coated paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriter's Laboratories to U.S. and Canadian standards and conform to European Union Directives.

#### Models

PLF20FA delivers 20 gph of chilled drinking water. PLF20FACP is corrosion resistant and has a stainless steel cabinet, frame, base parts and fasteners. Special protective coating is applied to compressor, condenser, cooling tank, pre-cooler, water drain and interconnecting water and refrigerant lines.

#### Standard Features

- > Waterways are lead-free in materials and construction
- > Dial-A-Drink® Bubbler
- > Stainless steel top
- > Heavy-gauge steel cabinet with separate galvanized steel base
- > High-efficiency cooling tank and coil.
- > Refrigerant R-134a
- > Limited 5-year warranty

#### Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint on galvanized steel
- > Optional finishes at additional cost: Stainless Steel and optional powder coated finishes.
- > Standard cabinet finish Model PLF20FACP: Stainless Steel

#### Installation

- > Prior to roughing-in, consult local, state and federal codes
- > Shipped with complete instructions

#### Options

- > Push Handle 029603-004
- > Push Back 029603-005
- > Push Down 029603-006
- > Kit 031505-001 is required for Field Installation of the above glass fillers
- > Foot pedal operated



Components in this cooler are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

**Limited 5-Year Warranty** (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

**Export Warranty:** One year on sealed refrigeration system and most parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and European Union Directives.




Model	Capacities*				115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Options	Net Wt. Approx.
	Cooling Capacity GPH (LPH)	Base Rate GPH (LPH)	Pre-Cooler	Hot'N Cold™ Model	Compr. HP	Full Load Amps	Rated Watts			
PLF20FA**	20.0	11.0	Yes	No	1/3	7.3	600	Yes	Yes	91 Lbs.
PLF20FACP	20.0	11.0	Yes	No	1/3	7.3	600	Yes	No	91 Lbs.

Specifications subject to change without notice

\* Industry Standard Rating Condition 80°F inlet water temperature. † Hot N' Cold model delivers 45 six-ounce cups of water per hour in addition to cold water.

\*\* Special export models available, operable on 220-240 volts, 50/60 Hertz. cULus certification not applicable.

**OASIS® AGAINST-A-WALL WATER COOLER MODELS P8FA, PLF8FAH, P14FA, PLF14FAH, PLF20FA, PLF20FACP**

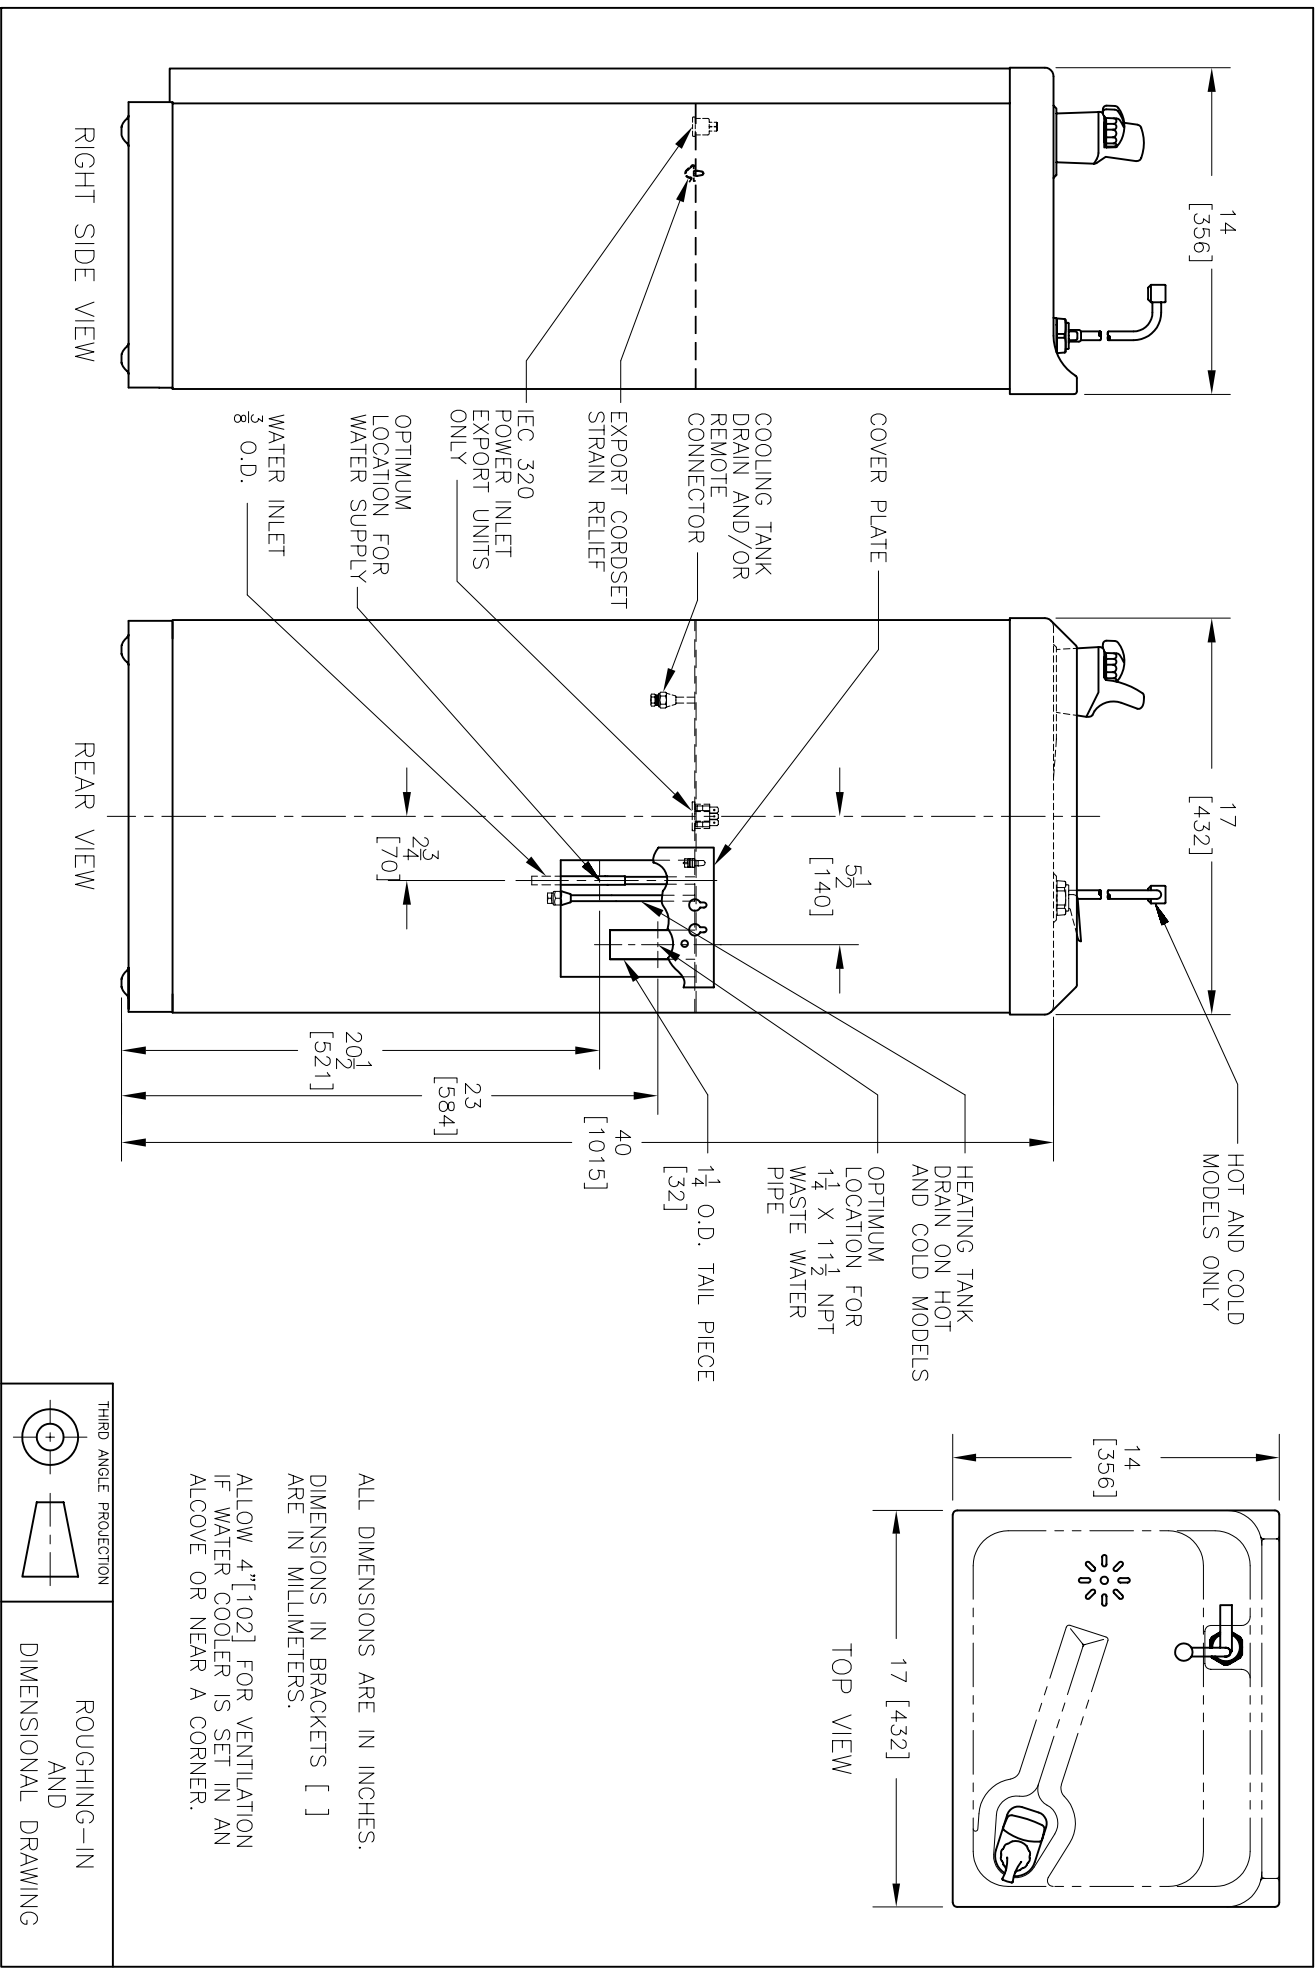

ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS. ALLOW 4" [102] FOR VENTILATION IF WATER COOLER IS SET IN AN ALCOVE OR NEAR A CORNER.

<p>THIRD ANGLE PROJECTION</p>	<p>ROUGHING-IN AND DIMENSIONAL DRAWING</p>
-------------------------------	--