



6715 MOUNTING PLATE
MUST BE INSTALLED BEFORE FINISH WORK. THIS PLATE IS A STANDARD ITEM ON MODEL 1501.

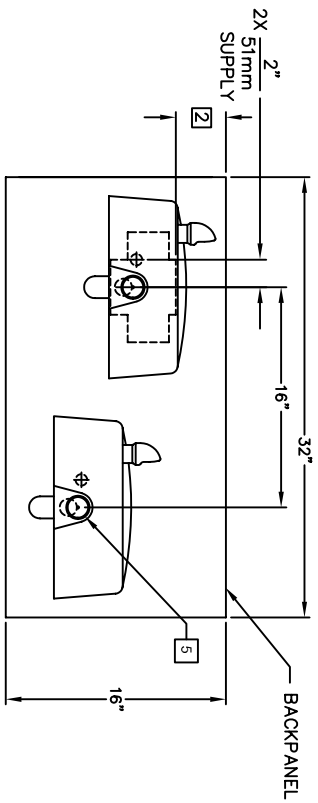

NOTES:

1. 3" DIM TO SLOTTED OPENING ON THE MOUNTING PLATE MUST BE ON THE TOP L.H. SIDE WHEN INSTALLED.
2. 4-5/8" DIM TO SLOTTED OPENING ON THE BACKPANEL MUST BE ON TOP L.H. SIDE WHEN INSTALLED.
3. HOLD ROUGH-IN DIMENSIONS ± 1/4" (6.4MM).
4. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO. FOR INSTALLATION HEIGHTS OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY.
5. REFER TO 587ASS/RRK587A OPERATION AND MAINTENANCE MANUAL FOR PUSH BUTTON AND VALVE INSTALLATION/MAINTENANCE INSTRUCTIONS.



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

EQ# NO.:	1501	MODEL(S):	1501
DATE:	09/15/01	INFO FAX DOC #:	21501
APPROVED:		INSTALLATION/FAXBACK	
REV:	00020769888 D	SIZE:	A
	14939A00	SHEET:	1 OF 1