



MODEL: 4460 4461

GENERAL

Pedestal, Endura II™ Steel yard hydrant with textured powder coat finish and E-Coat immersion for year-round beauty with minimum maintenance. The E-Coat immersion process coats the outside and inside of the hydrant for the ultimate in corrosion protection. Hydrant provides ability to connect garden hoses or fill pails in outdoor applications. Ideal for golf courses, ball parks and swimming pools for irrigation purposes. This hydrant is rated for inlet water pressure of 20-105 psi. **Model 4460 is hydrant with non-locking hose bib. Model 4461 includes panel and a door that can be secured with a standard padlock** (not included).

WATER INLET

1/2" O.D. Tubing

SUGGESTED SPECIFICATIONS

Hydrant shall include 10" domed cap with vandal-resistant screws. Model 4460 has access panel with recessed hose bib. Model 4461 has access panel with recessed hose bib and a door that can be secured with a standad padlock (not included). Not designed for sub-freezing applications.

Note: Continued product improvement makes specifications subject to change without notice. See Halsey Taylor website for most current spec sheet.

Yard Hydrant



4460



4461

Standard finish is Evergreen textured powder-coat Endura II™

Each 4460/4461 consists of 1 carton of the following:

Hydrant

Service stop not included.

Shipping weight: 4460 101 lbs.
4461 108 lbs.

JOB NAME: _____

 ENGINEER/CONTRACTOR NAME:

 APPROVAL: _____
 DATE: _____

Endura II™ Tubular Yard Hydrant

(CONTINUED)

MOUNTING INSTRUCTIONS and PLUMBING CONNECTIONS

Provide solid, well-drained surface to mount hydrant (concrete pad recommended.) (6) 1/2" anchor bolts (not included) should be attached securely to mounting surface in order to secure fountain. (Refer to rough-in diagram.)

Locate and install plumbing through ground as required. NOTE: Hydrant is not furnished with service valve.



Position hydrant over plumbing and secure base to anchor bolts. Remove access panel and connect supply and water lines. Turn on water supply and check for leaks. Reassemble access panel to pedestal. Refer to owners' manual for detailed instructions.

OPERATING PRESSURES:

Supply water - 105 psi maximum
Hydrant is rated for inlet water pressure of 20-105 psi. A pressure reducing regulator should be used if the inlet water supply exceeds 105 psi.

NOTE: Not designed for sub-freezing applications.



Model 4460

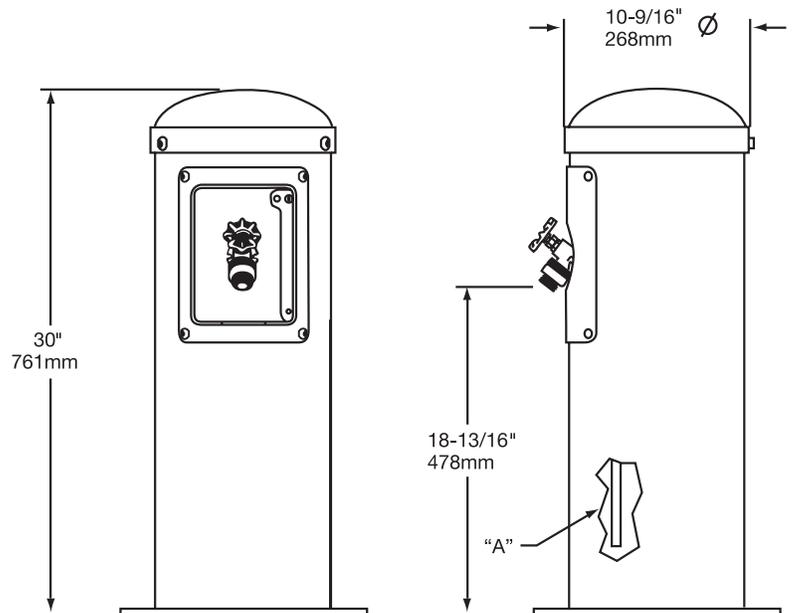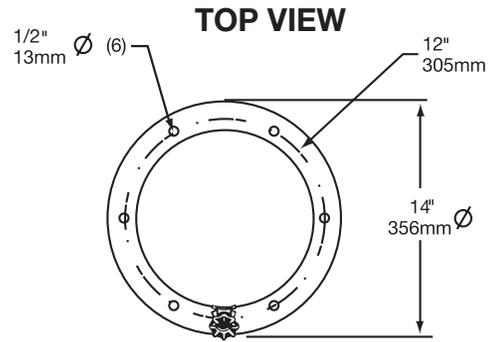

Model 4461

(With Locking Hose Bib)

TOP VIEW

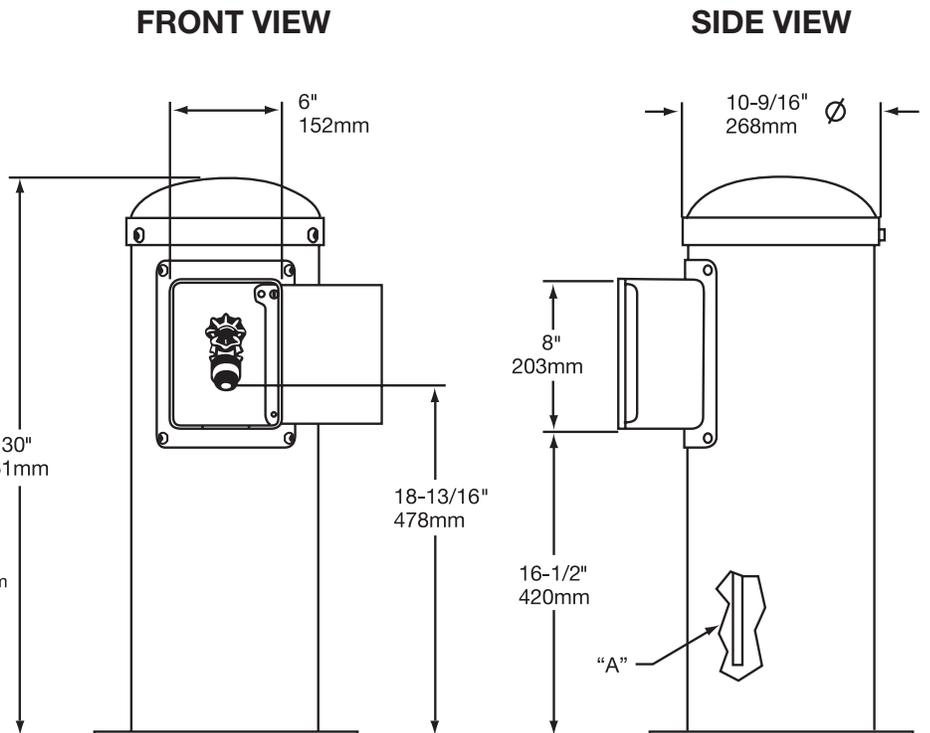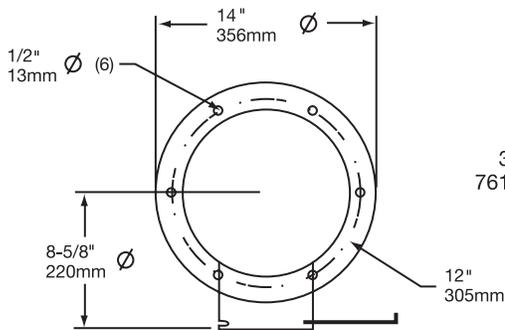

Halsey Taylor®

LEGEND

A = 1/2" O.D. UNPLATED COPPER TUBE CONNECT - SHUT OFF VALVE BY OTHERS