



Technical Sheet

Compact Free-Standing

- P3CP



Suggested Specification

Model P3CP shall deliver 3.0 gph of 50° water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Bubbler shall have flexible guard and a lever handle shall activate water flow. Bubbler shall provide smooth steady water flow by means of integral regulator that operates from 20 to 100 PSI supply pressure. Evaporator shall be high efficiency tank type and shall be encapsulated in insulation. R-134a refrigeration system shall be hermetically sealed and refrigerant flow shall be capillary tube controlled. An adjustable thermostat having an off position shall control refrigeration system. Stainless steel top shall have an integral drain strainer. Cabinet finish shall be Greystone powder coated on galvanized steel (standard finish) or stainless steel. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

Models

- P3CP delivers 3.0 gallons of chilled drinking water per hour

Standard Features

- Waterways are Lead-Free in materials and construction
- Bubbler with activation lever and flexible bubbler guard
- Stainless steel top
- Heavy-gauge steel cabinet with separate galvanized steel base
- High-efficiency cooling tank system

Finishes

- Standard cabinet finish: Greystone powder coated paint on galvanized steel
- Optional finishes: Sandstone powder coated paint; Stainless steel (at additional cost)

Installation

- Prior to roughing-in, consult local, state and federal codes
- Shipped with complete instructions

Options

- Push Handle glass filler 029603-004
- 035946-001-SP is required for glass filler field install

Limited 5-Year Warranty

(Continental limits of the United States and Canada)
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act




WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov



Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
P3CP	3.0	3.0	No	No	1/4	4.6	460	Yes	Yes	66 Lbs.

*Industry standard rating condition 80° F inlet water temperature
**Special export models available, operable on 220-240 volts, 50/60 Hertz. cULUS certification not applicable.

OASIS® COMPACT FREE-STANDING

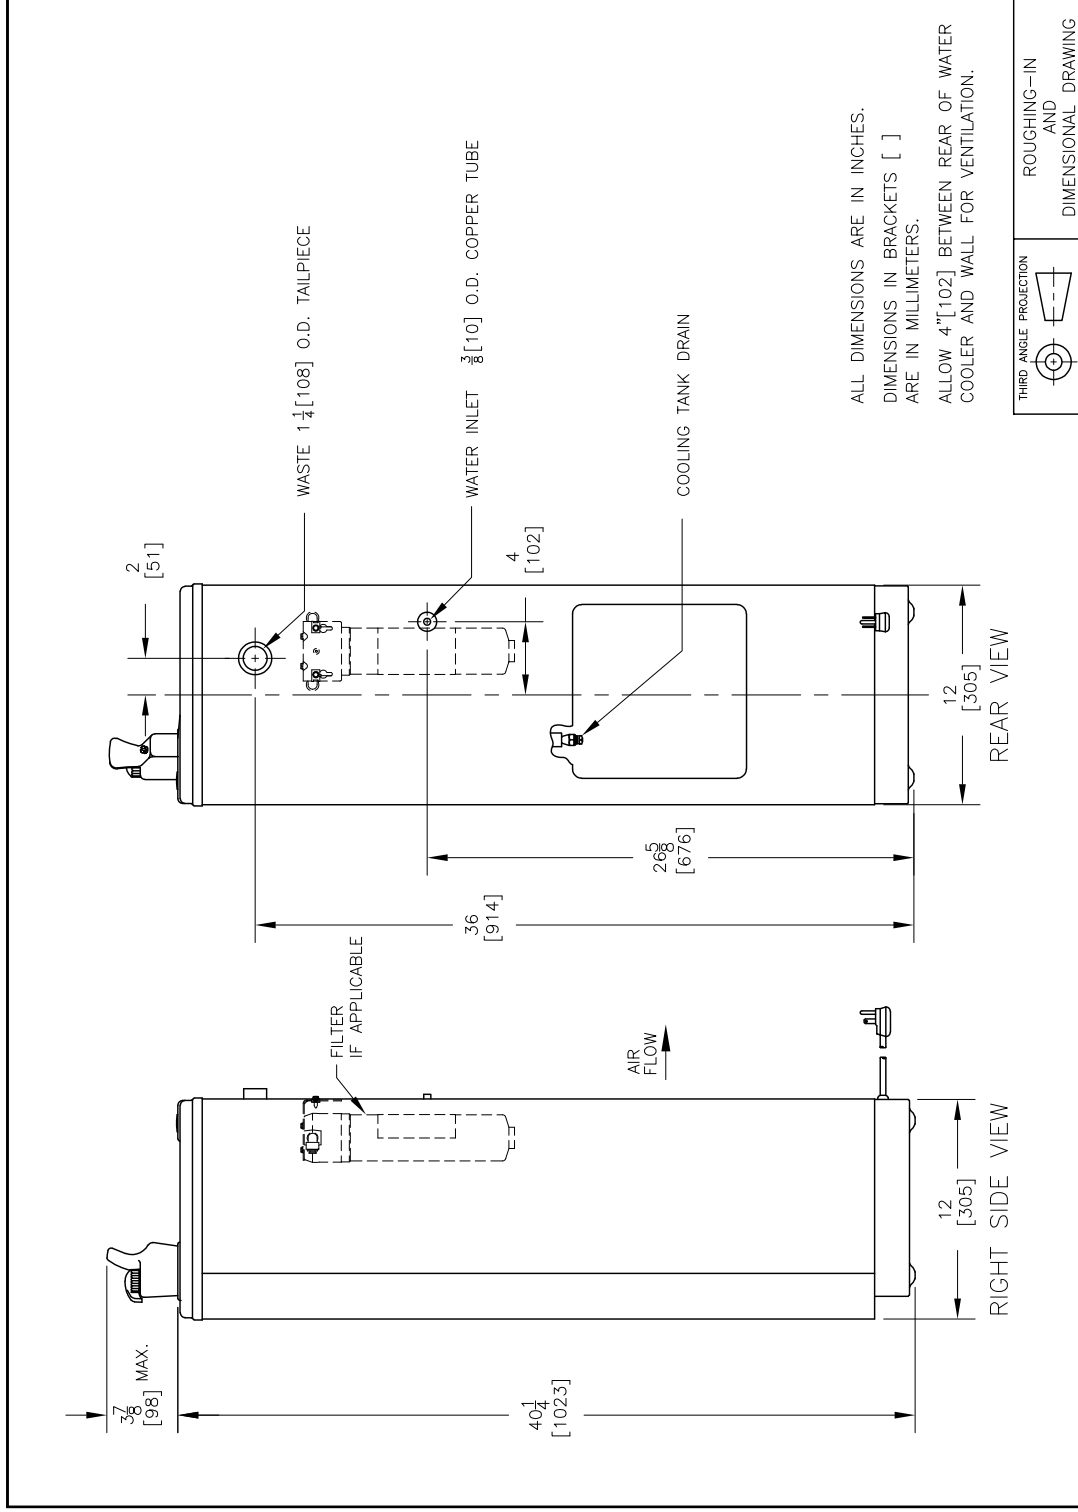

OASIS INTERNATIONAL

222 East Campus View Blvd.
Columbus, OH 43235

www.oasiscoolers.com

1-800-646-2747

OASIS is a registered trademark of LVD Acquisition, LLC dba Oasis International. © 2019 LVD Acquisition AS0044-F-2003