




Water Coolers

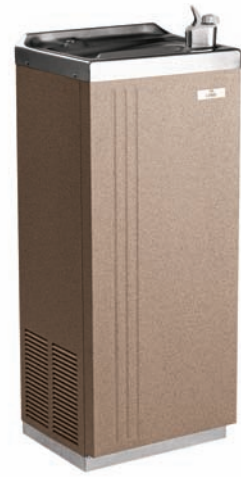

AGAINST-A-WALL OR FREE-STANDING P8FA, PLF8AH, P14FA, PLF14FAH

Suggested Specification

Cabinet finish shall be Sandstone powder coated paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriter's Laboratories to U.S. and Canadian standards and conform to European Union Directives.

Models

P8FA delivers 8 gph of chilled drinking water
 PLF8FAH delivers 8 gph of chilled drinking water plus 45 cups of piping hot water
 P14FA delivers 14 gph of chilled drinking water
 PLF14FAH delivers 14 gph of chilled drinking water plus 45 cups of piping hot water

Standard Features

- > Waterways are lead-free in materials and construction
- > Dial-A-Drink® Bubbler
- > Stainless steel top
- > Heavy-gauge steel cabinet with separate galvanized steel base
- > High-efficiency cooling tank and coil.
- > Refrigerant R-134a
- > Limited 5-year warranty

Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint on galvanized steel
- > Optional finishes at additional cost: Stainless Steel and optional powder coated finishes.

Installation

- > Prior to roughing-in, consult local, state and federal codes
- > Shipped with complete instructions

Options

- > Push Handle 029603-004
- > Push Back 029603-005
- > Push Down 029603-006
- > Kit 031505-001 is required for Field Installation of the above glass fillers (except Model PLF8FAH, PLF14FAH)
- > Foot pedal operated



Components in this cooler are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most components parts. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

Export Warranty: One year on sealed refrigeration system and most parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and European Union Directives.



NSF certified
P8FA only

Certified to
NSF/ANSI 61 Section 9


Model	Capacities*				115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Options	Net Wt. Approx.
	Cooling Capacity GPH (LPH)	Base Rate GPH (LPH)	Pre-Cooler	Hot'N Cold™ Model	Compr. HP	Full Load Amps	Rated Watts			
P8FA	8.0	8.0	No	No	1/5	4.6	320	Yes	Yes	94 Lbs.
PLF8FAH†	8.0	8.0	No	Yes	1/5	8.9	820	No	Yes	98 Lbs.
P14A**	14.0	8.0	Yes	No	1/5	4.6	320	Yes	Yes	96 Lbs.
PLF14FAH	14.0	8.0	Yes	Yes	1/5	8.9	820	No	Yes	99 Lbs.

Specifications subject to change without notice

* Industry Standard Rating Condition 80°F inlet water temperature. † Not 'N' Cold model delivers 45 six-ounce cups of water per hour in addition to cold water.

** Special export models available, operable on 220-240 volts, 50/60 Hertz. cULus certification not applicable.

OASIS® AGAINST-A-WALL WATER COOLER MODELS P8FA, PLF8FAH, P14FA, PLF14FAH, PLF20FA, PLF20FACP

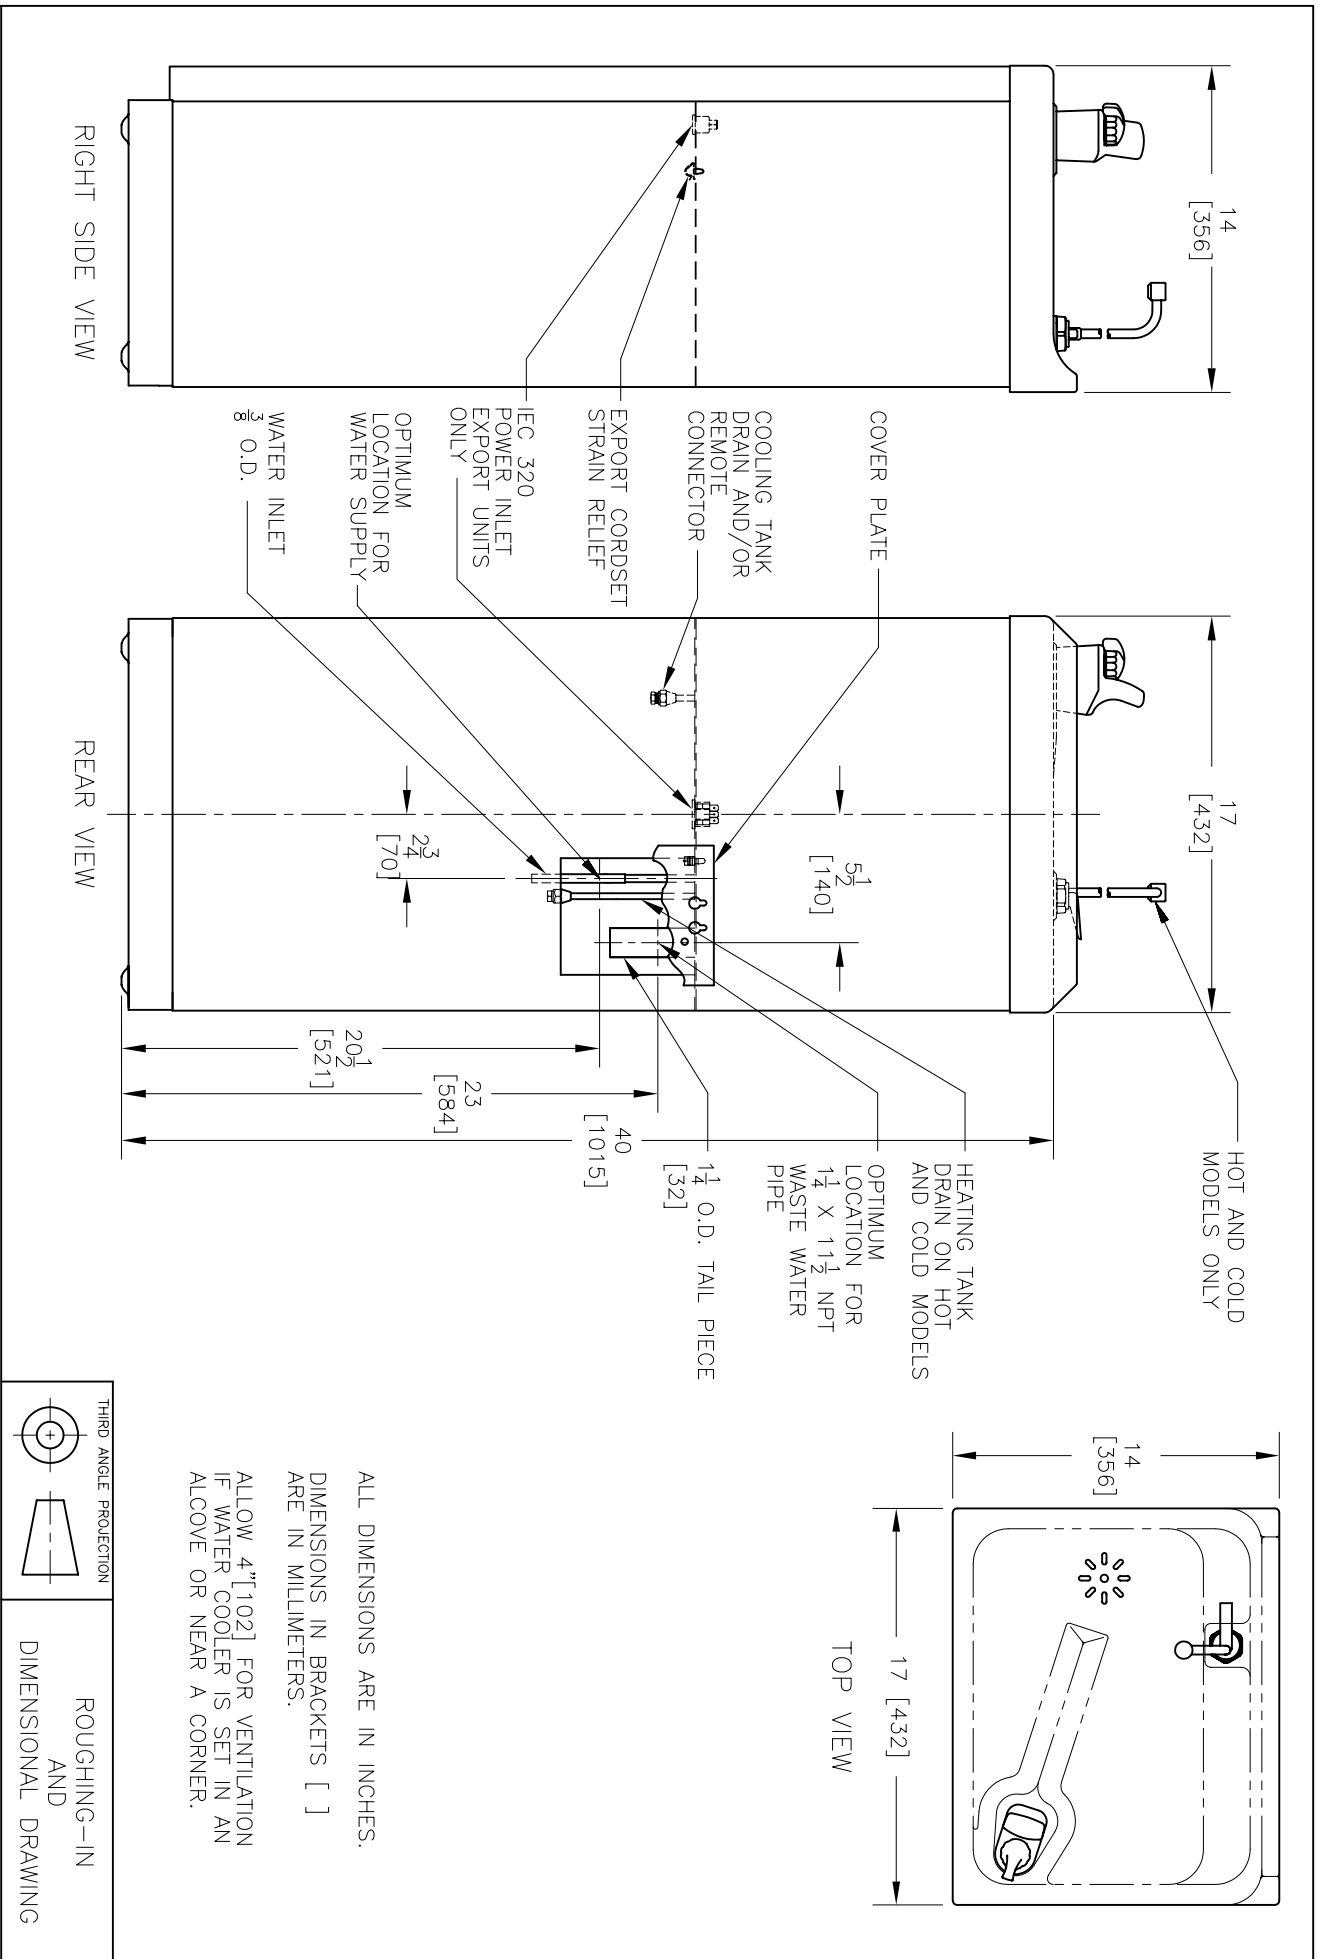

ALL DIMENSIONS ARE IN INCHES.
 DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.
 ALLOW 4" [102] FOR VENTILATION IF WATER COOLER IS SET IN AN ALCOVE OR NEAR A CORNER.

<p>THIRD ANGLE PROJECTION</p>	<p>ROUGHING-IN AND DIMENSIONAL DRAWING</p>
-------------------------------	--