




Technical Sheet

Against-A-Wall or Free-Standing

- P8FA
- P14FA

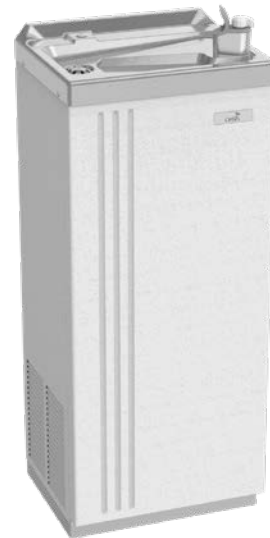

Suggested Specification

Model P8FA shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water, per ASHRAE18 testing. Model P14FA shall deliver 14.0 gph of 50°F water at 90°F ambient and 80° inlet water. Bubbler shall have flexible guard and a lever handle shall activate water flow. Bubbler shall provide smooth steady water flow by means of integral regulator that operates from 20 to 100 PSI supply pressure. Cabinet finish shall be Greystone powder coated paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriters Laboratories to U.S. and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

Models

- P8FA delivers 8 gph of chilled drinking water
- P14FA delivers 14 gph of chilled drinking water

Standard Features

- Waterways are lead-free in materials and construction
- Bubbler with activation lever and flexible bubbler guard
- Stainless steel top
- Heavy-gauge steel cabinet with separate galvanized steel base
- High-efficiency cooling tank

Finishes

- Standard cabinet finish: Greystone powder coated paint on galvanized steel
- Optional finishes: Sandstone powder coated paint; Stainless steel (at additional cost)

Installation

- Prior to roughing-in, consult local, state and federal codes
- Shipped with complete instructions

Options

- Push Handle glassfiller 029603-004
- 035946-001-SP required for field installation of glassfillers (except Model PLF8FAH, PLF14FAH)
- Foot pedal operated 026645-017

Limited 5-Year Warranty

(Continental limits of the United States and Canada)
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act



WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
P8FA	8.0	8.0	No	No	1/4	4.6	460	Yes	Yes	94 Lbs
P14FA**	14.0	8.0	Yes	No	1/4	4.6	460	Yes	Yes	96 Lbs

*Industry standard rating condition 80° F inlet water temperature
**Special export models available, operable on 220-240 volts, 50/60 Hertz. cULUS certification not applicable.

Specifications subject to change without notice

OASIS® AGAINST-A-WALL OR FREE-STANDING

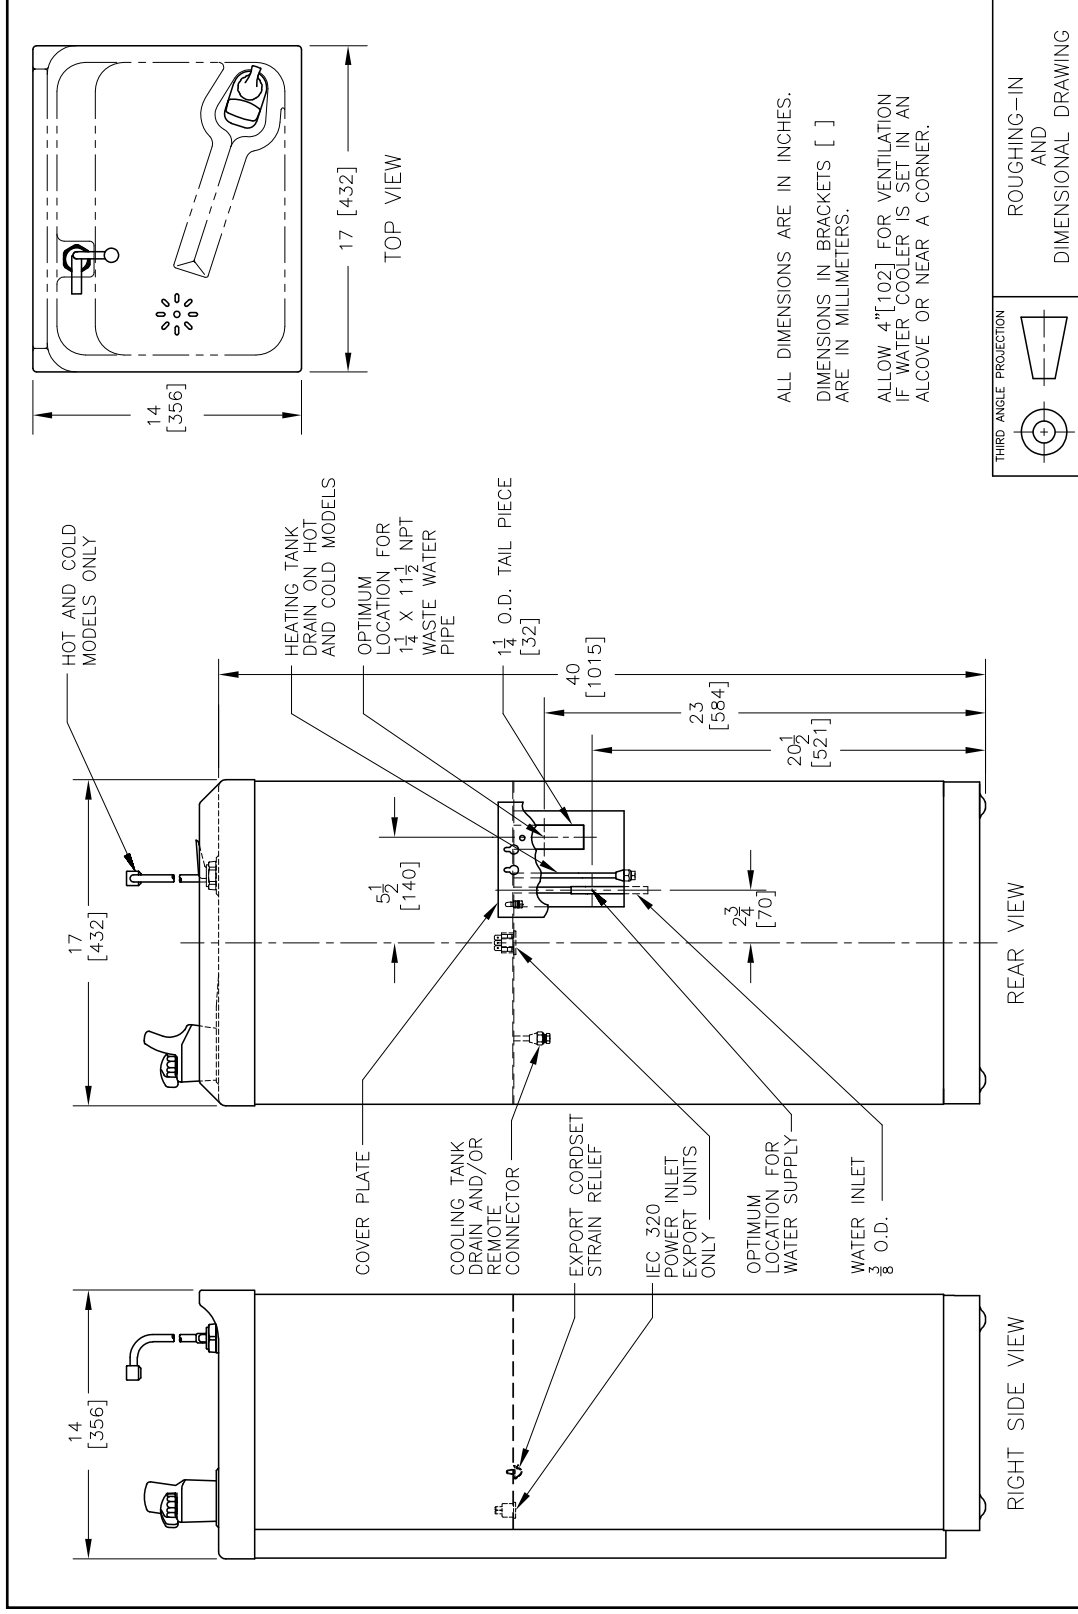

OASIS INTERNATIONAL
 www.oasiscoolers.com
 222 East Campus View Blvd.
 Columbus, OH 43235
 1-800-646-2747

OASIS is a registered trademark of LVD Acquisition, LLC dba Oasis International, © 2019 LVD Acquisition AS0045-F-2003